
MANUALLY OPERATED OIL DROPPER UNI-25 1/8 BSP PLEXIGLASS

Model: 1701 1101

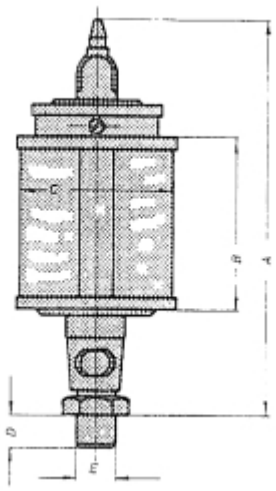

Description

Drip feed lubricator model UNI of pickled brass, with metering spindle for exact drip dosing. Instantaneous shutting-off, large replenishing bowl with dust guard cover – cylinder glass of plexiglas or natural glass – easy visual checking of the dripping.

Type :	Draad E (BSP):	A :	B :	C :	D :	Inh. ml. :
UNI 25	1/8 1/4	72	28	25	8	10
UNI 30	1/8 1/4	77	30	30	8	20
UNI 40	1/8 1/4	100	40	40	10	36
UNI 50	1/4 3/8	110	50	50	12	84
UNI 60	1/4 3/8 1/2	120	60	60	12	140
UNI 60 x 80	1/4 3/8 1/2	140	80	60	12	200
UNI 80 x 100	1/2 3/4 1/4 bi.dr.	160	100	80	16	500
UNI 100 x 100	1/2 3/4 1/4 bi.dr.	185	100	100	16	750
UNI 100 x 120	1/2 3/4 1/4 bi.dr.	195	120	100	16	1000
UNI 130 x 150	1/2 3/4 1/4 bi.dr.	240	150	130	16	2000
UNI 150 x 180	1/2 3/4 1/4 bi.dr.	270	180	150	16	3000

Technical data

Content (ml)	10
Material	Perspex

Smeertechniek Rotterdam
Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55
F 010 - 466 66 55
E info@smeertechniek.nl
W www.smeertechniek.nl

Scan the QR code to order this product