


SPRING-LOADED GREASE POT TYPE SBK50.1 G1/8

Model: 43 012 01

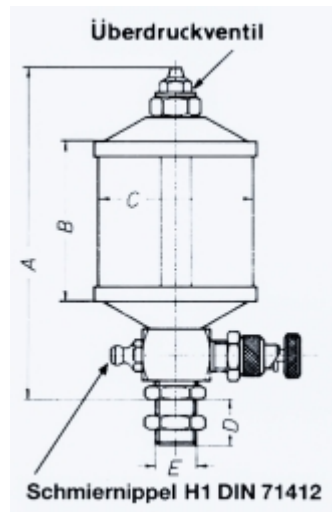

Description

Automatic lubricator with pressure spring, refill grease nipple H1 DIN 71 412 and pressure control valve

- thick-walled plexiglass container
- adjustable in different positions
- easy visual inspection of the oil level possible.
- available with three different power systems.
- suitable for any grease that functions under pressure

Max. Ambient temperature: approx. 60 ° C.

3 versions:

- 50.0 - adjustable and possible to switch off
- 50.1 - adjustable
- 50.2 - fixed yield (non-adjustable)

SBK 50.0 Durchfluss einstellbar mit Momenteneinstellung	Flow adjustment with torque	Highly instant on start	
SBK 50.1 Durchfluss einstellbar mit Gewindestift	Flow adjustment with screw pin	Highly on start	
SBK 50.2 Durchfluss nicht einstellbar	Fixed flow	High on start	

Threaded connection (E):	G1/8
Total height (A):	110 mm
Height reservoir (B):	55 mm
Diameter reservoir (C):	50 mm
Thread length (D):	15 mm

Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55

F 010 - 466 66 55

E info@smeertechniek.nl

W www.smeertechniek.nl

Scan the QR code to
order this product

