
SLOT GREASE SPRING LOADED GREASE CUP CONTENT 220CC HEAVY SPRING M10.1

Model: 220A/F-H



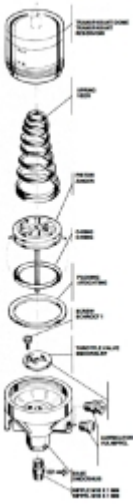

Description

AUTOMATIC REFILLABLE GREASE

Grease lubricator with a capacity of 220 cc for the continuous lubrication of bearings, bushings, etc.
Functions when the machine, etc. is in operation.
Saves downtime and costly repairs.

CHARACTERISTICS :

LEXAN reservoir and housing
Three different types of compression springs
Adjustable throttle valve
Adjusting screw for grease delivery adjustment
Dust and waterproof grease cup 100 cc robust design with a temperature range of –23 ° C + 132 ° C.

BENEFITS :

Visual fat consumption and remote control
Grease lubrication pot can be installed in all circumstances, including dangerous, difficult to access and / or covered areas
All grease viscosities can be used
Lubrication is continuous; only pumpable fats.
Fat will not harden; grease cup can be installed in any position, including underwater.
The grease content reservoir reduces the need for maintenance and prevents too much / too little lubrication.

THROTTLE VALVE FOR ADJUSTING LUBRICANT FLOW:

Set by loosen screw 1; turning the throttle to the right is more fat to the left less fat; then tighten the screw to the desired position.

Smeertechniek Rotterdam
Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55
F 010 - 466 66 55
E info@smeertechniek.nl
W www.smeertechniek.nl

Scan the QR code to order this product

Note: Fill the lubrication point with grease before installing the automatic "SLOT GREASE" grease cup.

Smeertechniek Rotterdam
Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55
F 010 - 466 66 55
E info@smeertechniek.nl
W www.smeertechniek.nl

Scan the QR code to order this product