

PULSARLUBE SUITABLE FOR OIL 500 CC


Model: PL-OL500

Description

Technical specifications:

Oil Reservoir Capacity
Power Supply
Operating Pressure
Operating Temperature
Dispensing Periods
Remote Installation
Multi-Point Installation
Oil Viscosity Range
IP Code

500ml (refillable)
DC 4.5V Battery Pack
10bar (145psi) (depending on oil viscosity)
Standard Alkaline Battery : -15°C-60°C
1, 2, 3, 6, 12 month & H (15 days)
Max. 6m (20ft) with O.D. Ø4 tube
Max. 3m (10ft) with O.D. Ø4 tube (Up to 4 lube points)
100/10,000 cSt@40°C
IP54

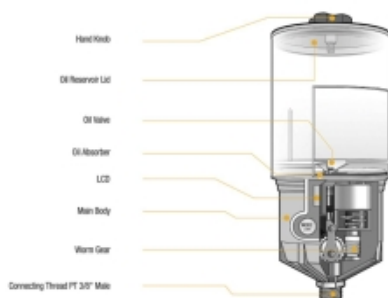

Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55

F 010 - 466 66 55

E info@smeertechniek.nl

W www.smeertechniek.nl

Scan the QR code to
order this product

