



MECLUBE PNEUMATIC BARREL PUMP 60:1, 180-220KG

Model: 010-1015-000



Description

Suitable for central supply of plants where a major quantity of grease and a major pressure at long and short distance are required.

The operating pressure of the grease pumps may vary between a minimum of 2.5 bar and a maximum of 8 bar.

In order to optimize the efficiency and the life of our pumps we recommend to use filtered and lubricated air.

General data

Weight (kg) 7,1 kg

Specifications

Air inlet connection G1/4

Grease outlet connection G1/4

Shank diameter 30 mm

Sound output 76 dB

Shank length 305 mm


Air pressure 2,5 - 8 bar

Air consumption 130 l/min

Compression ratio 60:1

Grease delivery capacity 6 bar (free flow) 1600 gr

For drums 180 - 220 kg

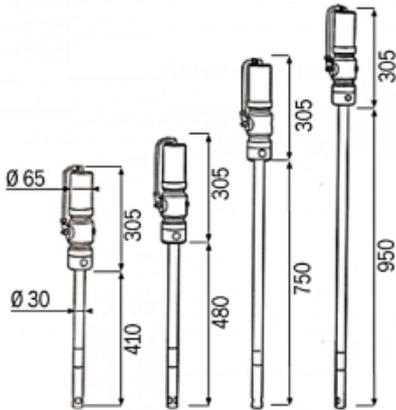

Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55

F 010 - 466 66 55

E info@smeertechniek.nl

W www.smeertechniek.nl

Scan the QR code to
order this product



Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55

F 010 - 466 66 55

E info@smeertechniek.nl

W www.smeertechniek.nl

Scan the QR code to
order this product

