



MEER INFORMATIE OVER KABELSMERING

Model: Corelube Kabelsmering



2100-BOS-T1 SYSTEM
Cable Size Range: 0.125" (3.2mm) to 1.88" (47.6mm)



2100-BOS HOUSING

FASTEST TURNING

Oil Air Line to Release Over Lubricant

ADVANTAGES

- Easy to use.
- Lubricates wire ropes at speeds of 900 Feet/Minute. (270 Meter/Minute).
- One branch line fits a range of rope sizes. Eliminates the need for a rubber seal for every size of wire rope.
- Wire ropes of various sizes can be run through the unit.
- Wire ropes can run through the unit at any angle.
- The same pump fits all sizes of containers.

The new CORELUBE 2100-BOS System is designed to apply STRAN-CORE Lubricant.

- STRAN-CORE is an advanced Concrete Adhesive with Extreme Traction and Anti-Slip Properties.
- Greases like petroleum oil is less viscosity than.
- Clings to surface and penetrates lower levels for maximum protection, traction and hold.
- Long lasting performance - wire rope lasts up to 100% longer.
- Non-toxic. Non-flammable and safe.
- Extends lifespan of both wire production and steel frame. Add to a 100% - 400kg.
- STRAN-CORE Lubricant is sold globally from the world's best. Contact the Original Company about STRAN-CORE.

2100-BOS-T1 SYSTEM



2100-BOS-T1 SYSTEM



4100-BOS 4.0" Cable 5100-BOS 5.0" Cable 6100-BOS 6.0" Cable

Description

Ook voor uw kabelsmering kunt u bij ons terecht. Kabelsmering op maat draagt bij aan de levensduur van uw kabels. Wij hebben onder andere het Corelube systeem 2100-BOS-T1 System en 3100-BOS-R1 System ins ons leveringsprogramma met bijbehorende kabelreinigers zoals de helix groove cleaners.

Mocht u meer informatie willen ontvangen? Een offerte?
Of graag iemand laten meedenken over de beste oplossing?

Neem dan gerust contact met ons op via info@smeertechnik.nl.

3100-BOS HOUSING



Smeertechnik Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55

F 010 - 466 66 55

E info@smeertechnik.nl

W www.smeertechnik.nl

Scan de QR code om
dit product te bestellen



3100-800 SYSTEM
Cable Size Range: 6.40" (16mm) to 3.0" (77mm)

The 3100-800-R1 System is designed to apply thick oil, joint grease & soft greases that are self-purging.



ADVANTAGES

- Easy to use.
- Lubricates wire ropes at speeds of 500 Ft./Min.
- One brush does the job of rope sizes. Eliminates the need for a laborer used for every size of wire rope.
- Wire rope deterioration can be less through the unit.
- Wire ropes can run through the unit at any angle.
- The same pump fits all sizes of containers from a drum to a pail.



Accommodates Wire Rope Sizes From: 7/32" (5.5mm) to 2 9/16" (65 mm)

The CORELUBE A-1600-LB3 ADVANTAGE

- The CORELUBE A-1600 System is a high pressure wire rope grease injection unit for NLGI #00, #1, #2 greases.
- The Beads and Backings wrap into the bearing without touch.
- Solid machined housing with dual O-ring seals.
- Removes old lubricant, dirt and grime.
- High Pressure 50:1 Pump.
- High Output Volume Pump 4.38" 150.5mm Air Motor.

SYSTEM INCLUDING:

- (1) A-1600 Applicator Housing
- (1) 50:1 High Output Pump In-line 10-20 Kg Containers
- (1) Drum Cover to fit 10-20 Kg Containers
- (1) Roll-up Plate 10-20 Kg Containers
- (1) Seal (dry Seal)
- (1) Breaker / Backing Guide (any size)
- (1) Beads
- (2) Tie-Down Restraint Straps
- (1) High Pressure 50:1 Motor (CPL) with Fittings
- (1) Air Regulator/Filter with Gauge & Valve
- (1) High Pressure Discharge Valve




Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55
F 010 - 466 66 55
E info@smeertechniek.nl
W www.smeertechniek.nl

Scan de QR code om dit product te bestellen



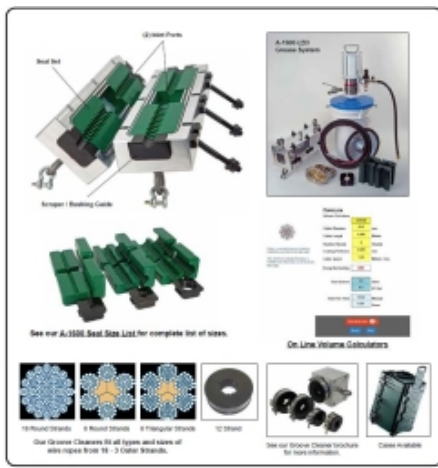

CoreLabe Equipment's Helix Groove Cleaners are designed to remove contaminants from the valleys between the strands of wire rope. The cleaner works by rotating with the helical lay of the wire rope.

The Helix Groove Cleaners are designed to work with CoreLabe's applicator rollers or thrust block as shown at right.

HELIX GROOVE CLEANER TYPES AVAILABLE:

- Diameter Ranges: 13.0 mm – 127.0 mm
- Number of Outer Strands: 3 – 18
- Left & Right Lay
- Round Stranded Wire Ropes
- Triangular/Strapped Stranded Wire Ropes

See our HGC Order Form & HGC Installation Instructions for more information.

The Thrust Block option. See our Thrust Block brochure for more information.

SMEERTECHNIEK ROTTERDAM

CoreLabe Equipment's Helix Groove Cleaners are designed to remove contaminants from the valleys between the strands of wire rope. The cleaner works by rotating with the helical lay of the wire rope.

The number of the Thrust Block is to give the groove cleaners a flat abrasive surface to clean against. Groove overlaps are uniform in the same size as the wire rope diameter. These are not only to ensure the block with angle or steps, and notches.

All CoreLabe's lubrication systems come standard with a guide bearing and do not require the thrust block. The thrust block is an option if you want to have a complete lubrication system or changing the rope type (especially from the non-rotating lay).

SMEERTECHNIEK ROTTERDAM

Smeertechniek Rotterdam

Cairostraat 74
3047 BC Rotterdam

T 010 - 466 62 55
F 010 - 466 66 55
E info@smeertechniek.nl
W www.smeertechniek.nl

Scan de QR code om dit product te bestellen

